

Fig No:GBF-150 2"~20"
DN50~DN500

Features:


Conical seat design
Round Bonnet with Integral Yoke.
Outside Screw and Yoke, Rising stem design
Seat face stellited, ground and lapped to a mirror finish, conical seat machined to 8 RMS
Universal Trim-13 Cr stem, wedge 13 Cr face and stellited seat API Trim 8 suitable for applications up to 850°F (454°C)
Body and Bonnet joint accurately machined, Full enclosed gasket

Sample Castings:

Before castings are released for production, the Modentic NDE inspector level, evaluates and approves the submitted x-ray films (100% coverage) as per ASME B16.34 acceptance standard
Improves the internal integrity of castings (RT level 2 or better) at pattern approval

Standard compliance:

Valve design according to BS 1873
Shell wall Thickness according to BS 1873
Pressure-temperature rating according to ASME/ANSI B16.34
Material according to ASTM
Face to Face according to ASME/ANSI B16.10 class 150 RF
End to end according to ASME/ANSI B16.10 class 150 BW
Flanged dimension according to ASME/ANSI B16.5 class 150 RF, Finish 125-250 AARH
Butt weld dimension according to ASME/ANSI B16.25
Pressure testing according to API 598

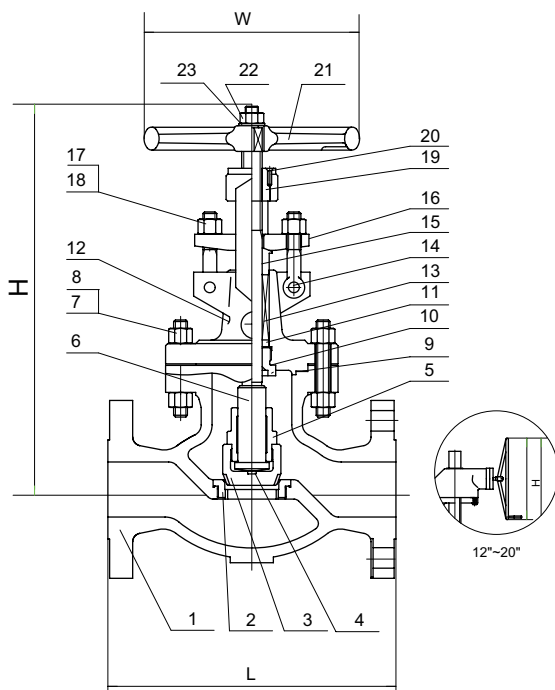

MATERIAL LIST

NO	PART NAME	MATERIAL
1	Body	ASTM A216 GR.WCB
2	Seat Ring	ASTM A105+ STELLIE Faced
3	Disc	ASTM A216 GR.WCB+13%Cr Faced
4	Disc Thrust Plate	ASTM A276 Type 410
5	Disc Nut	ASTM A276 Type 410
6	Stem	ASTM A182 F6
7	Bonnet Stud Bolts	ASTM A193 GR.B7
8	Stud Bolt Nuts	ASTM A194 GR.2H
9	Gasket	304+Graphite, Spiral Wound
10	Bonnet Bushing	ASTM A276 Type 410
11	Gasket Ring	ASTM A276 Type 410
12	Packing	Braided Graphite & Die formed Graphite Ring
13	Bonnet	ASTM A216 GR.WCB
14	Eye Bolt Pins	Carbon Steel
15	Gland	ASTM A276 Type 410
16	Gland Flange	ASTM A216 GR.WCB
17	Gland Eye Bolts	ASTM A193 GRB7
18	Eye Bolt Nuts	ASTM A194 GR.2H
19	Yoke Sleeve	ASTM A439 GR.D-2
20	Screw	Carbon Steel
21	Handwheel	Malleable Iron
22	Handwheel Nut	Carbon Steel
23	Backing Ring	Carbon Steel

Other Materials Also Available On Requested

DIMENSIONS unit:mm

SIZE	L	H	W
2"	203	338	200
2-1/2"	216	373	250
3"	241	396	250
4"	292	467	300
5"	356	497	350
6"	406	524	350
8"	495	588	400
10"	622	738	500
12"	698	862	560
14"	787	950	600
16"	914	994	650
18"	978	1040	610
20"	978	1105	610