

Fig no. GTF-150

1/2" - 12" (DN15- DN300)



Features:

Flexible wedge,
OS & Yoke design, Body Bolted type
Rising stem design, Non rising handwheel
Integral seat
For General Chemical and Industrial application

Standard Compliance :

Design per API 603
Body wall thickness : ANSI B16.34
Face to face : ANSI B16.10 class 150
Flange dimension : ANSI B16.5 class 150 RF
Body material : A890 6A/ A351 CD3MWCuN
Pressure testing : EN 12266-1/ API 598

Specification :


End connection : Flange end
Working pressure : 290 psi (CWP)
Temperature : -20 ~ 180 C

Options :

1. Gasket/ stem packing to be Graphite
2. Gear box for 8" and above
3. Flange face smooth finished

MATERIALS LIST

NO.	NAME PARTS	MATERIALS
1	BODY	ASTM A890 Gr.6A
4	WEDGE	ASTM A890 Gr.6A (FLEXIBLE WEDGE)
5	STEM	ASTM A479 Gr.S32750
9	BONNET	ASTM A890 Gr.6A
11	GASKET	PTFE.
14	PACKING	PTFE.
15	GLAND	ASTM A479 Gr.S32750
16	EYE BOLT NUT	ASTM A194 Gr.8 (HEAVY)
18	SLEEVE	ASTM A394 Gr.D2C (1-1/2" ~ 12")
19	HANDWHEEL	ASTM A536 DUCTILE IRON
20	SET SCREW	ASTM A193 Gr.B8
22	STEM NUT	ASTM A351 Gr.CF8
23	WASHER	ASTM A276 Gr.304 (1" UNDER)
24	HANDWHEEL NUT	ASTM A351 Gr.CF8
25	NAME PLATE	ASTM A666-304
35	BONNET STUD	ASTM A193 Gr.B8 CLASS 2
37	BONNET NUT	ASTM A194 Gr.8 (HEAVY)
40	EYE BOLT	ASTM A193 Gr.B8
47	GLAND FLANGE	ASTM A351 Gr.CF8
48	EYE BOLT PIN	ASTM A276 Gr.304
53	GREASE FITTING	ANSI 304 (1-1/2" ABOVE)

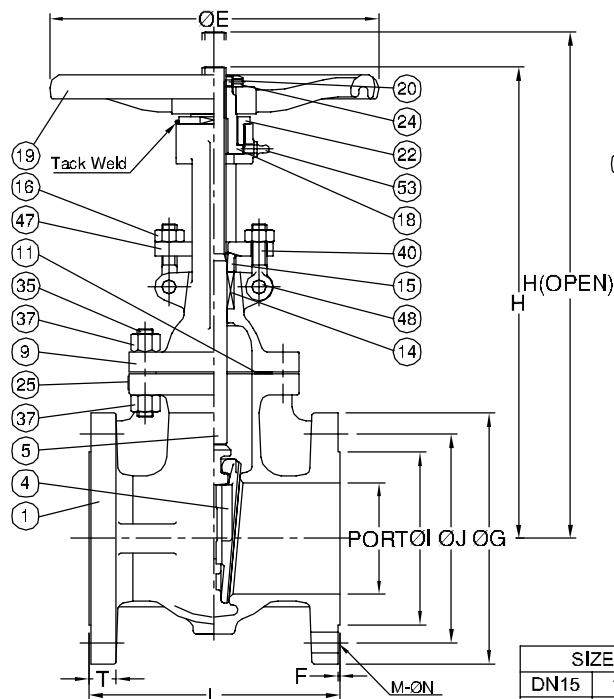

DIMENSIONS

SIZE	PORT	L	øE	H	H(OPEN)	øG	øJ	øI	T	F	M	øN	
DN15	1/2"	15.0	108.0	100.1	178.1	196.1	88.9	60.5	35.1	9.7	1.6	4	15.9
DN20	3/4"	19.1	117.3	100.1	199.9	220.0	98.6	69.9	42.9	10.4	1.6	4	15.9
DN25	1"	25.4	127.0	150.1	231.9	260.1	108.0	79.2	50.8	11.2	1.6	4	15.9
DN40	1-1/2"	38.1	165.1	180.1	262.9	308.1	127.0	98.6	73.2	14.2	1.6	4	15.9
DN50	2"	50.8	177.8	180.1	278.9	337.1	152.4	120.7	91.9	15.7	1.6	8	19.1
DN65	2-1/2"	63.5	190.5	199.9	328.9	403.1	177.8	139.7	104.6	17.5	1.6	8	19.1
DN80	3"	79.0	203.2	199.9	366.0	452.9	190.5	152.4	127.0	19.1	1.6	8	19.1
DN100	4"	101.6	228.6	300.0	430.0	544.1	228.6	190.5	157.2	23.9	1.6	8	19.1
DN125	5"	127.0	254.0	300.0	507.0	650.0	254.0	215.9	185.7	23.9	1.6	8	22.2
DN150	6"	152.4	266.7	300.0	572.0	739.9	279.4	241.3	215.9	25.4	1.6	12	22.2
DN200	8"	203.2	292.1	350.0	724.9	944.1	342.9	298.5	269.7	28.4	1.6	12	22.2
DN250	10"	254.0	330.2	400.1	873.0	1145.0	406.4	362.0	323.9	30.2	1.6	12	25.4
DN300	12"	304.8	355.6	450.1	1008.9	1332.0	482.6	431.8	381.0	31.8	1.6	12	25.4