

Fig No: MD-53-900 Reduce Bore

18"x16"~36"x30"



Feature:

Design: API6D, ASME B16.34, API607/ API6FA fire safe design
 Side entry ball
 Anti-static design, Anti blow-out-stem
 Carbon steel or special alloy upon request
 Cast steel are also supplied in full compliance with NACE MR0175

Service:

General, Low Temperature, Cryogenic, Sub sea, Oil & Gas application, High temperature, Underground

Design:

3-pc Design, by casting
 Reduce Bore
 Face to face: ASME B16.10
 Flange connection: ASME B16.5 Class 900 RF (Above size 26", which would compliance with ASME B16.47)
 Pressure-Temperature Rating: ASME/ANSI B16.34
 Testing and inspection: API6D, API598
 •Automatically Drain Plug (NPT) on Body(2"~4" - option, Upward 6" - Basic function)
 •Double bleed and Block(2"~4" - option, Upward 6" - Basic function)
 •Sealant Emergently Injection Fittings(2"~4" - option, Upward 6" - Basic function)

Options:

- With Locking Device
- Extended Stem (Cryogenic application)
- Actuator installation
- Gear Box

Size:18"x16"~20"x18"


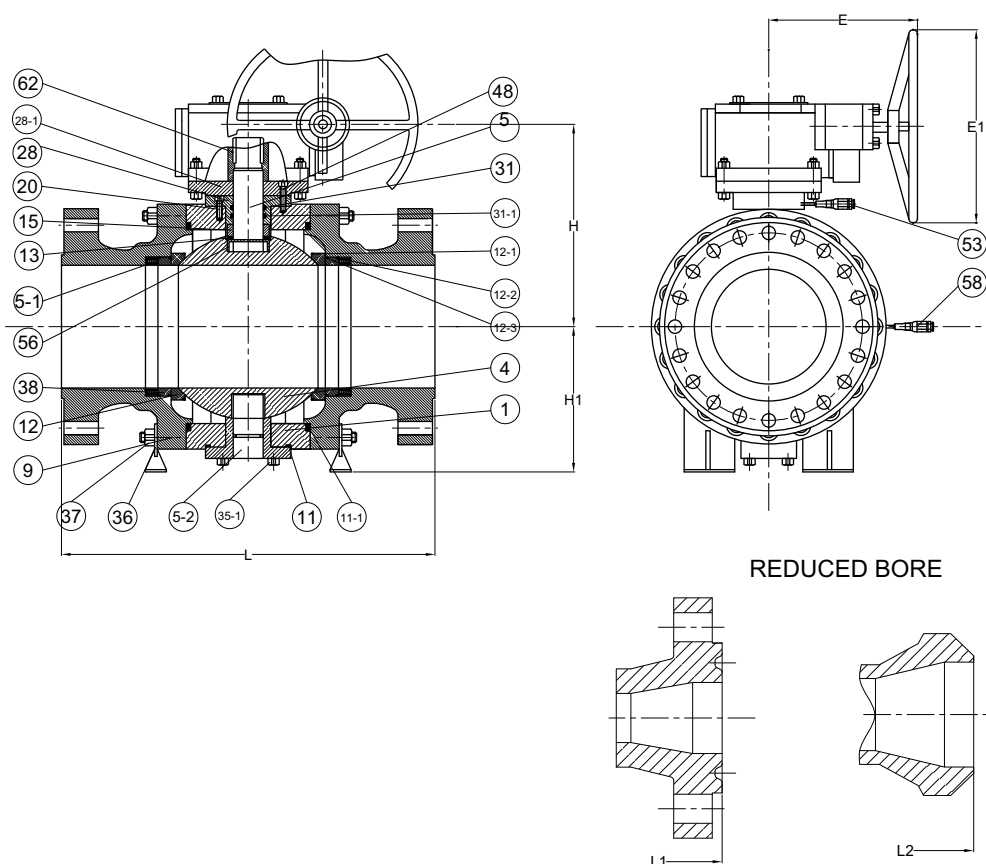


Fig No: MD-53-900 Reduce Bore

Size:24"x20"~36"x30"

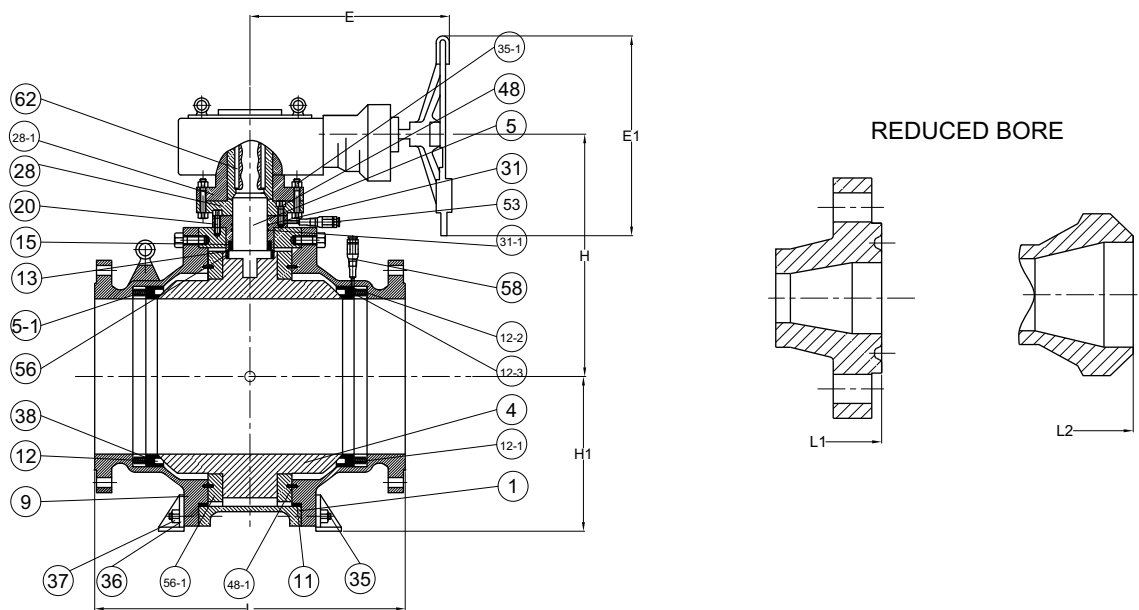

MATERIALS LIST

NO.	PART NAME	MATERIAL
1	BODY	A216-WCB,WCC,A352-LCB,A351-CF8,CF8M,CF3,CF3M,CN7M,CF8C,CDMCu,CN-3MN
4	BALL	A105+ENP,A182-F6,F304,F316,F304L,F316L,F321,F51,F53,ALLOY-20
5	STEM	1045+ENP,A182-F6,F304,F316,F304L,F316L,F321,F51,F53,ALLOY-20,4140+ENP,17-4PH
5-1	SPRING	SS304,INCONEL,1566+ENP
9	CAP	A216-WCB,WCC,A352-LCB,A351-CF8,CF8M,CF3,CF3M,CN7M,CF8C,CD4MCu,CN-3MN
11	GASKET	SS304,SS316+FLEXIBLE GRAPHITE SPIRAL WOUND
12	SEAT	PTFE,RPTFE,NYLON,PEEK,PPL,POM, KARBATE,MOLON,DEVLOON
12-1	SEALING RING	FLEXIBLE GRAPHITE
12-2	SEALING RING	SS304,SS316+FLEXIBLE GRAPHITE SPIRAL WOUND
12-3	O-RING	VITON
13	THRUST WASHER	PTFE,RPTFE,STAINLESS STEEL+N
15	PACKING	FLEXIBLE GRAPHITE
20	SCREW	1035,STAINLESS STEEL
28	STUFFING BOX	A105+ENP,A182-F6,F304,F316,F304L,F316L,F321,F51,F53,ALLOY-20
28-1	CONNECTING PLATE	1025,A216-WCB,A351-CF8
31	O-RING	VITON
31-1	O-RING	NBR,VITON
35	BOLT	A193-B7,B7M,B8,B8M
35-1	SCREW	1025,SS304
36	ADJUST WASHER	PTFE,1045+RPTFE,STAINLESS STEEL+RPTFE
37	NUT	A194-2H,2HM,8,8M
38	SEAT RING	A105+ENP,A182-F6,F304,F316,F304L,F316L,F321,F51,F53,ALLOY-20
48	PIN	ANSI 1566
48-1	PIN	1045,SS
53	OIL CUP	1025,SS304
56	BEARING	1045+RPTFE,SS304+RPTFE,SS316+RPTFE
56-1	BEARING RETAINER	1025,A216-WCB,A351-CF8
58	GREASE FITTING	1025,SS304,SS316,SS304L,SS316L,SS321,ALLOY-20,F51,F53
62	KEY	1045

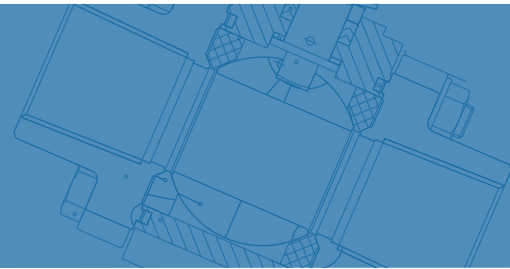


Fig No: MD-53-900 Reduce Bore

ANSI CLASS 900 DIMENSIONS

unit:mm

SIZE	L	L1	L2	E	E1	H	H1	Wt1(kg)	Wt2(kg)
18x16" Ⓔ	1219.0	1232.0	1219.0	530.0	550.0	727.0	406.0	2155.0	2050.0
20X16" Ⓔ	1321.0	1334.0	1321.0	530.0	550.0	727.0	406.0	2495.0	2374.0
20X18" Ⓔ	1321.0	1334.0	1321.0	530.0	550.0	785.0	418.0	2730.0	2600.0
24X20" Ⓔ	1549.0	1568.0	1549.0	530.0	550.0	839.0	561.0	3895.0	3708.0
30x24" Ⓔ	*1880.0	*1902.0	*1880.0	---	812.0	853.0	634.0	7200.0	6850.0
28x26" Ⓔ	*1753.0	*1775.0	*1753.0	---	914.0	909.0	725.0	---	---
30x28" Ⓔ	*1880.0	*1902.0	*1880.0	---	914.0	980.0	765.0	---	---
32x30" Ⓔ	*2032.0	*2054.0	*2032.0	---	914.0	1095.0	810.0	---	---
36x30" Ⓔ	*2286.0	*2315.0	*2288.0	---	914.0	1095.0	810.0	10778.0	10265.0

* Ⓔ Reduce Bore Ⓔ Regular Bore

* Modentic Reserves The Rights To Change Any Details Without Prior Notice.