

Fig No: MD-67-900 Reduced Bore

3"x2"~20"x16"



Feature:

Design: API6D, ASME B16.34, API607/ API6FA fire safe design
Side entry ball
Anti-static design, Anti blow-out-stem
Carbon steel or special alloy upon request
Cast steel are also supplied in full compliance with NACE MR0175

Service:

General, Low Temperature, Cryogenic, Sub sea, Oil & Gas application, High temperature, Underground


Design:

2-pc Design, by casting
Reduce Bore
Face to face: ASME B16.10
Flange connection: ASME B16.5 Class 900 RF (Above size 26", which would compliance with ASME B16.47)
Pressure-Temperature Rating: ASME/ANSI B16.34
Testing and inspection: API6D, API598
•Automatically Drain Plug (NPT) on Body(2"~4" - option, Upward 6" - Basic function)
•Double bleed and Block(2"~4" - option, Upward 6" - Basic function)
•Sealant Emergently Injection Fittings(2"~4" - option, Upward 6" - Basic function)

Options:

- With Locking Device
- Extended Stem (Cryogenic application)
- Actuator installation
- Gear Box

Size: 3" x 2" ~8" x 4"

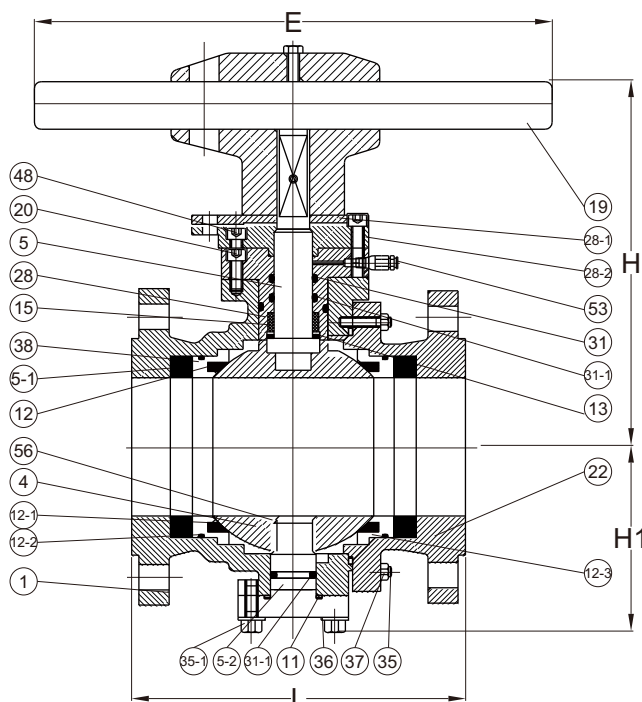

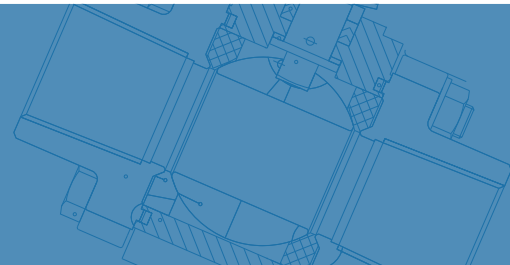


Fig No: MD-67-900 Reduced Bore

MATERIALS LIST

NO.	DESCRIPTION	MATERIAL
1	BODY	A216-WCB,WCC,A352-LCB,A351-CF8,CF8M,CF3,CF3M,CN7M,CF8C,CDMCu,CN-3MN
4	BALL	A105+ENP,A182-F6,F304,F316,F304L,F316L,F321,F51,F53,ALLOY-20
5	STEM	1045+ENP,A182-F6,F304,F316,F304L,F316L,F321,F51,F53,ALLOY-20,4140+ENP,17-4PH
5-1	SPRING	SS304,INCONEL,1566+ENP
5-2	TRUNNION	1045+ENP,A182-F6,F304,F316,F304L,F316L,F321,F51,F53,ALLOY-20,4140+ENP,17-4PH
9	CAP	A216-WCB,WCC,A352-LCB,A351-CF8,CF8M,CF3,CF3M,CN7M,CF8C,CD4MCu,CN-3MN
11	GASKET	SS304,SS316+FLEXIBLE GRAPHITE
12	SEAT	PTFE,RPTFE,NYLON,PEEK,PPL,POM, KARBATE,MOLON,DEVLO
12-1	SEALING RING	FLEXIBLE GRAPHITE
12-2	SEALING RING	SS304,SS316+FLEXIBLE GRAPHITE SPIRAL WOUND
12-3	O-RING	VITON
13	THRUST WASHER	PTFE,RPTFE,STAINLESS STEEL+N
15	PACKING	FLEXIBLE GRAPHITE
19	LEVER	A216-WCB+1020
20	SCREW	1035,STAINLESS STEEL
28	STUFFING BOX	A105+ENP,A182-F6,F304,F316,F304L,F316L,F321,F51,F53,ALLOY-20
28-1	LIMITED PLATE	1035,STAINLESS STEEL
28-2	CONNECTING PLATE	1025,A216-WCB,A351-CF8
31	O-RING	VITON
31-1	O-RING	NBR,VITON
31-2	O-RING	NBR,VITON
35	BOLT	A193-B7,B7M,B8,B8M
35-1	SCREW	PL1035,STAINLESS STEEL
36	ADJUST WASHER	PTFE,1045+RPTFE,STAINLESS STEEL+RPTFE
37	NUT	A194-2H,2HM,8,8M
38	SEAT RING	A105+ENP,A182-F6,F304,F316,F304L,F316L,F321,F51,F53,ALLOY-20
48	PIN	ANSI 1566
53	OIL CUP	1025,SS304
56	BEARING	1045+RPTFE,SS304+RPTFE,SS316+RPTFE

ANSI CLASS 900 DIMENSIONS


unit:mm

SIZE	L	L1	L2	E	H	H1	Wt (kg)
3x2" (G)	381.0	384.0	381.0	500.0	217.0	118.5	44.0
3x2-1/2" (G)	381.0	384.0	381.0	600.0	241.0	133.0	58.0
4x2-1/2" (R)	457.0	460.0	457.0	600.0	241.0	133.0	62.1
4x3" (G)	457.0	460.0	457.0	900.0	259.0	141.0	82.0
6x3" (R)	610.0	613.0	610.0	900.0	259.0	141.0	106.1
6x4" (G)	610.0	613.0	610.0	1000.0	297.0	167.0	127.0
8x4" (R)	737.0	740.0	737.0	1000.0	297.0	167.0	171.1

* (R) Reduce Bore (G) Regular Bore

Fig No: MD-67-900 Reduced Bore

Size: 8" x 6" ~ 20" x 16"

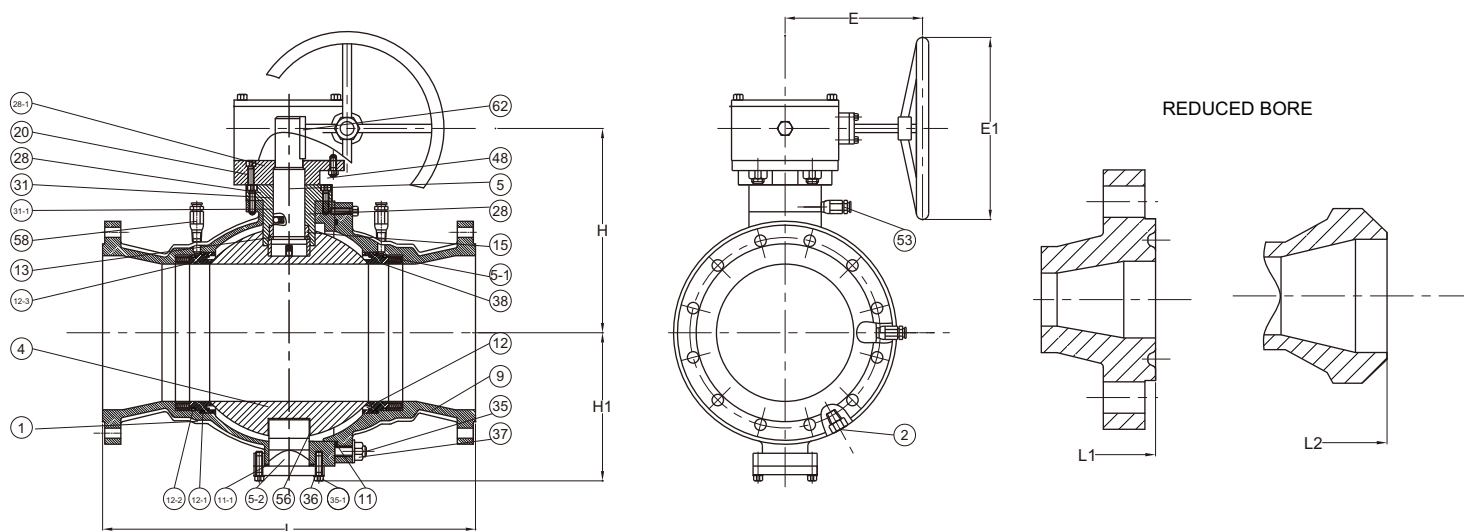

MATERIALS LIST

NO.	PART NAME	MATERIAL
1	BODY	A216-WCB,WCC,A352-LCB,A351-CF8,CF8M,CF3,CF3M,CN7M,CF8C,CDMCu,CN-3MN
2	DRAIN VALVE AND PLUG	1025,SS304,SS316,SS304L,SS316L,SS321,F51,F53
4	BALL	A105+ENP,A182-F6,F304,F316,F304L,F316L,F321,F51,F53,ALLOY-20
5	STEM	1045+ENP,A182-F6,F304,F316,F304L,F316L,F321,F51,F53,ALLOY-20,4140+ENP,17-4PH
5-1	SPRING	SS304,INCONEL,1566+ENP
5-2	TRUNNION	1045+ENP,A182-F6,F304,F316,F304L,F316L,F321,F51,F53,ALLOY-20,4140+ENP,17-4PH
9	CAP	A216-WCB,WCC,A352-LCB,A351-CF8,CF8M,CF3,CF3M,CN7M,CF8C,CD4MCu,CN-3MN
11	GASKET	SS304,SS316+FLEXIBLE GRAPHITE
11-1	O-RING	NBR,VITON
12	SEAT	PTFE,RPTFE,NYLON,PEEK,PPL,POM, KARBATE,MOLON,DEVLON
12-1	SEALING RING	FLEXIBLE GRAPHITE
12-2	SEALING RING	SS304,SS316+FLEXIBLE GRAPHITE SPIRAL WOUND
12-3	O-RING	VITON
13	THRUST WASHER	PTFE,RPTFE,STAINLESS STEEL+N
15	PACKING	FLEXIBLE GRAPHITE
20	SCREW	1035,STAINLESS STEEL
28	STUFFING BOX	A105+ENP,A182-F6,F304,F316,F304L,F316L,F321,F51,F53,ALLOY-20
28-1	CONNECTING PLATE	1025,A216-WCB,A351-CF8
31	O-RING	VITON
31-1	O-RING	NBR,VITON
35	BOLT	A193-B7,B7M,B8,B8M
35-1	SCREW	PL1035,STAINLESS STEEL
36	ADJUST WASHER	PTFE,1045+RPTFE,STAINLESS STEEL+RPTFE
37	NUT	A194-2H,2HM,8,8M
38	SEAT RING	A105+ENP,A182-F6,F304,F316,F304L,F316L,F321,F51,F53,ALLOY-20
48	PIN	ANSI 1566
53	OIL CUP	1025,SS304
56	BEARING	1045+RPTFE,SS304+RPTFE,SS316+RPTFE
58	GREASE FITTING	1025,SS304,SS316,SS304L,SS316L,SS321,ALLOY-20,F51,F53
62	KEY	1045

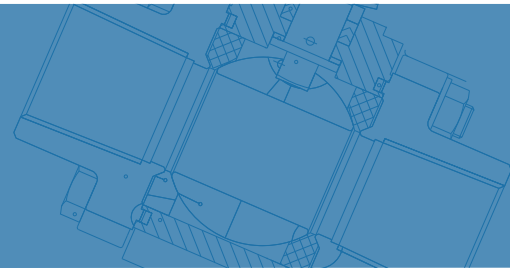


Fig No: MD-67-900 Reduced Bore

ANSI CLASS 900 DIMENSIONS

unit:mm

SIZE	L	L1	L2	E	E1	H	H1	Wt(kg)
8x6" Ⓒ	737.0	740.0	737.0	380.0	400.0	360.0	250.0	263.0
10X6" Ⓓ	838.0	841.0	838.0	380.0	400.0	360.0	250.0	316.0
10X8" Ⓒ	838.0	841.0	838.0	430.0	450.0	394.0	280.0	551.0
12X8" Ⓓ	965.0	968.0	965.0	430.0	450.0	394.0	280.0	620.0
12X10" Ⓒ	965.0	968.0	965.0	510.0	500.0	502.0	325.0	1010.0
14X10" Ⓓ	1029.0	1038.0	1029.0	510.0	500.0	502.0	325.0	1054.0
16x10" Ⓓ	1130.0	1140.0	1130.0	510.0	500.0	502.0	325.0	1143.0
14X12" Ⓒ	1029.0	1038.0	1029.0	510.0	500.0	592.0	380.0	1310.0
16X12" Ⓒ	1130.0	1140.0	1130.0	510.0	500.0	592.0	380.0	1420.0
18X12" Ⓓ	1219.0	1232.0	1219.0	510.0	500.0	592.0	380.0	1550.0
16X14" Ⓒ	1130.0	1140.0	1130.0	530.0	550.0	675.0	395.0	1855.0
18X14" Ⓒ	1219.0	1232.0	1219.0	530.0	550.0	675.0	395.0	---
20X14" Ⓓ	1321.0	1334.0	1321.0	530.0	550.0	675.0	395.0	---
18X16"	1219.0	1232.0	1219.0	530.0	550.0	762.0	426.0	2030.0
20X16"	1321.0	1334.0	1321.0	530.0	550.0	762.0	426.0	2374.0

* Ⓓ Reduce Bore Ⓒ Regular Bore

* Modentic Reserves The Rights To Change Any Details Without Prior Notice.