



Fig no. V-105MB Full Bore
1/4" ~ 4" DN 8- DN 100

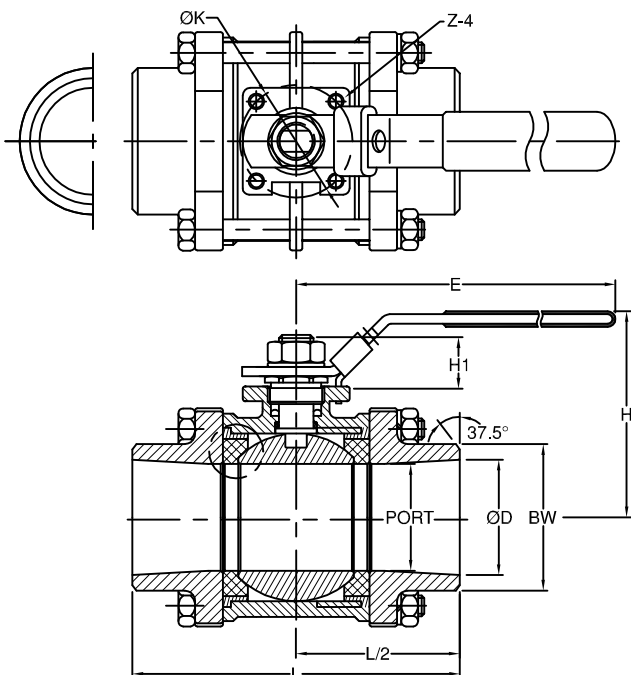

MATERIALS LIST

NO.	PART NAME	MATERIAL
1	BODY	1.4408/EN1503-1
4	BALL	ASTM A351 Gr.CF8M
5	STEM	SS316
9	END CAP	1.4408/EN1503-1
11	BODY SEAL	PTFE.
12	SEAT	PTFE.
13	THRUST WASHER	PTFE.
14	STEM PACKING	PTFE.
15	GLAND	SS304
19	HANDLE	SS304
21	HANDLE COVER	PLASTIC
23	HANDLE WASHER	SS304
24	HANDLE NUT	SS304
28	LOCKING DEVICE	SS304 (OPTION)
35	BODY BOLT	SS304
36	BOLT WASHER	SS304
37	BOLT NUT	SS304

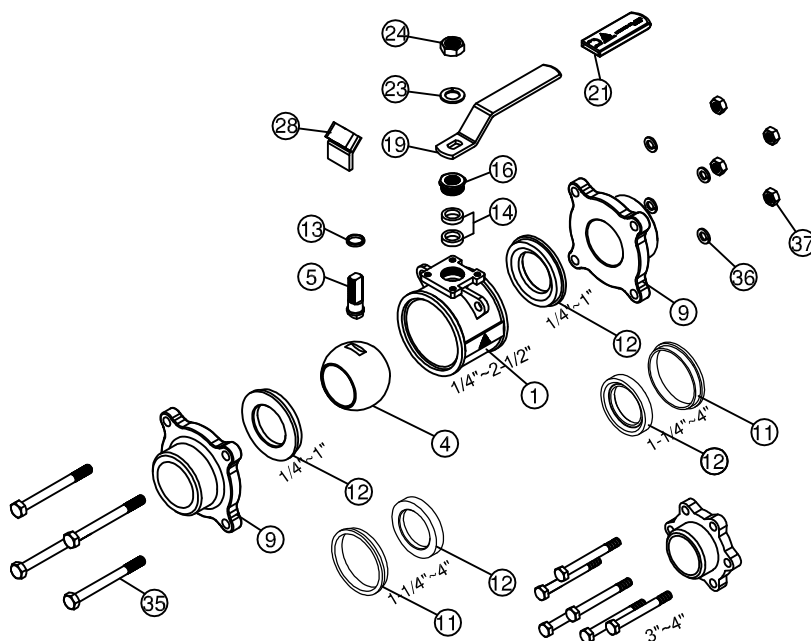

DIMENSIONS

unit:mm

SIZE	PORT	L	E	H	H1	ØD	ØK	Z-4	BW
DN8	1/4"	11.0	63.7	102.0	54.0	13.0	11.0	36.0	M5xP0.8 13.7
DN10	3/8"	12.5	63.7	102.0	54.0	13.0	12.5	36.0	M5xP0.8 17.1
DN15	1/2"	15.0	65.7	102.0	55.0	13.0	15.8	36.0	M5xP0.8 21.3
DN20	3/4"	20.0	76.2	126.0	62.0	17.0	20.9	36.0	M5xP0.8 26.7
DN25	1"	25.4	86.2	126.0	66.0	19.0	26.6	36.0	M5xP0.8 33.4
DN32	1-1/4"	32.0	102.8	154.0	90.0	27.0	35.1	50.0	M6xP1.0 42.2
DN40	1-1/2"	40.0	119.4	154.0	93.0	26.0	41.7	50.0	M6xP1.0 48.3
DN50	2"	50.8	131.4	188.0	102.0	24.0	53.0	50.0	M6xP1.0 60.3
DN65	2-1/2"	63.0	164.0	265.0	121.0	39.0	63.0	70.0	M8xP1.25 73.0
DN80	3"	76.0	182.7	265.0	134.0	37.0	77.5	102.0	M10xP1.5 88.9
DN100	4"	100.0	236.2	272.0	175.0	50.0	102.3	102.0	M10xP1.5 114.3

Features :

Investment Casting, ISO 5211 Mounting Pad
Blow out proof stem, In-line Maintenance
For Chemical, Industrial Application
Carbon Steel or Super Alloy upon request

Standard Compliance :

Body wall thickness : EN 12516-1/2/3

Butt Weld : B16.25

Face to Face : MD's standard

Body material : EN1503-1

Pressure testing : EN 12266

Specification :

End connection : Butt Weld end

Working Pressure : 63 bar (CWP) for DN8-50

40 bar (CWP) for DN65-100

Temperature : -20 to 180°C